


Adams-Harris Pattern Company

Designer Clothing for Fashion Dolls
All rights reserved, 2006

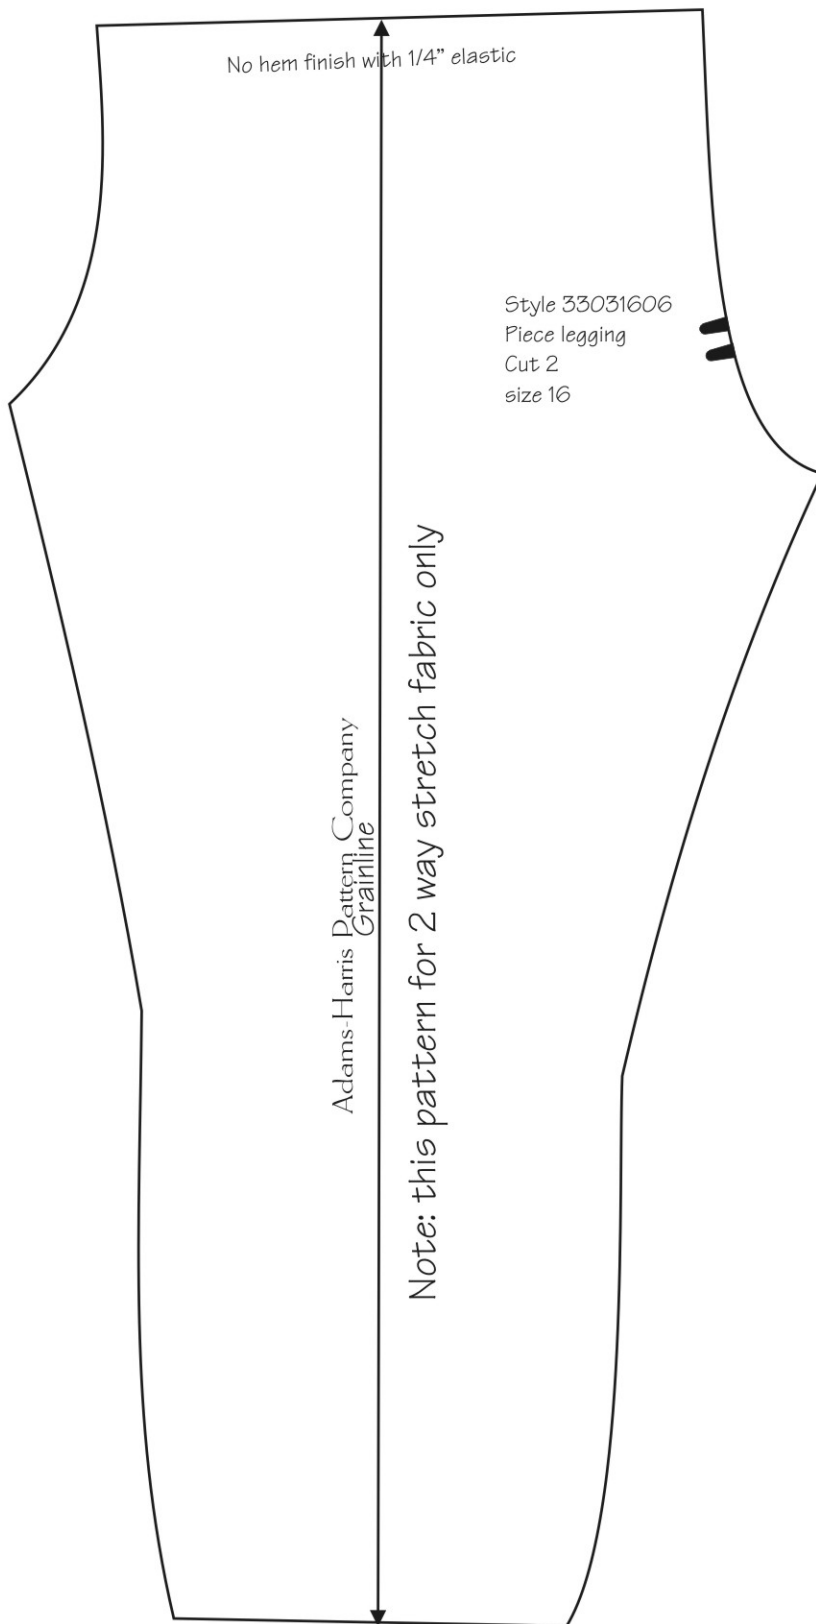

This box should print out 1 inch by 1 inch

Directions

Cut 2 of knit fabric with 4 way stretch. I used a sheer dance-wear fabric with high lycra content.
Scrap of elastic, 1/4 to 1/8 inch wide.

Hem the bottom of the legs using a roll hemmer on your serger or turn the bottom up 1/4 inch and use a stretch stitch on your machine.

With RST, match inseams of front and back leg and sew. Match crotch of both sides and sew. Match outseams on both legs and sew. Turn leggings right side out.

Measure dolls waist, and cut elastic 1/4 inch shorter. Over lap elastic 1/4 inch and tack in place.

Divide elastic into 4ths and mark. Pin elastic to right side of waistline matching marks to seams. Stretch elastic slightly as you top-stitch in place.

All seams are 1/4 inch.